



FLEX Installation and Usage

All of our Flexible Supplies (FLEX's), except where otherwise indicated, feature brass nuts, inserts and crimps.

- FLEX's must be installed in compliance with all applicable Building Codes & Bylaws. Product is approved for exposed locations only - behind the wall or tub deck installation is prohibited.
- FLEX's are intended to attach the supply lines to the fixture supply fitting in potable water applications only.
- FLEX's should not be stretched or kinked in any way.
- We recommend the use of Teflon® Tape on the threads to ensure a proper seal.
- Do not over tighten nuts (especially on Toilet FLEX). Tighten until snug plus 1/4 to 1/2 turn.
- FLEX's are for residential use only.

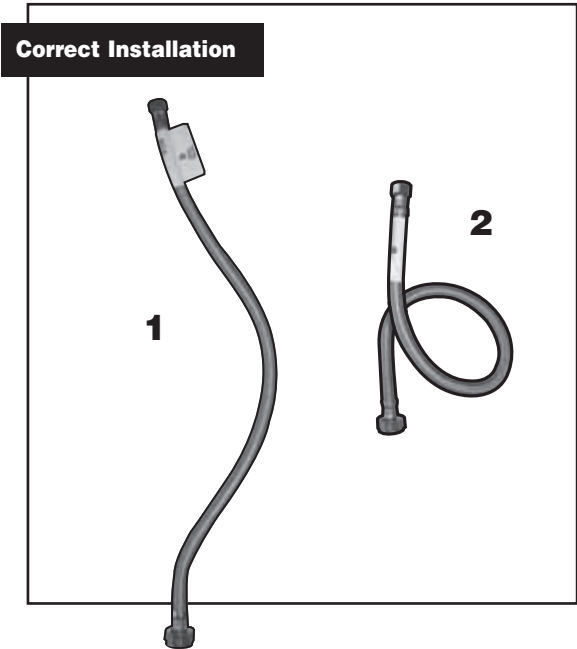

There should always be a smooth "bow" or "loop" as demonstrated in illustrations 1 & 2.

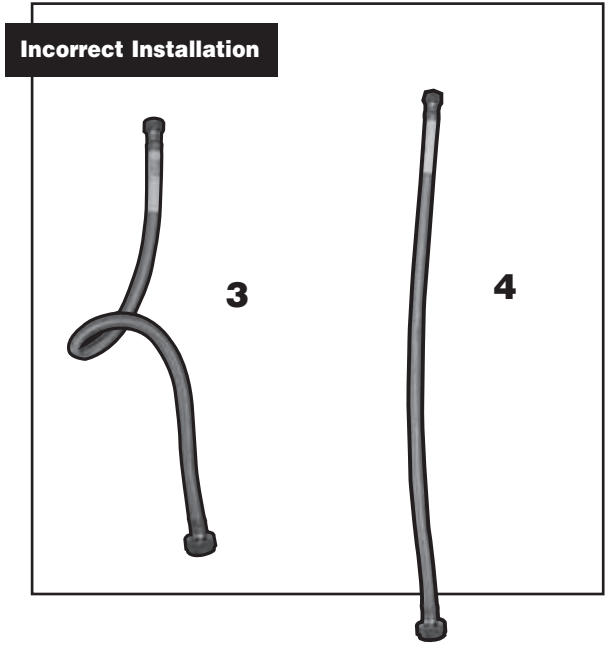

In illustration 3, the FLEX is kinked causing poor water flow.

In illustration 4, the FLEX is too short and is being stretched. This may cause failure of the hose.

Note: Misuse or improper installation will void all warranties and liabilities.